



Model RC 28-200



Accessories



General representation



Fire
Protection

2-Way Relay Valve

Description

A 2-Way, hydraulically operated, diaphragm actuated relay valve, applicable for service on deluge and pre-action valve trims. The RC 28-200 is designed to meet the requirements of hydraulic valve control trims, particularly when a fast reaction is required. When the pressure command is removed, the pressure in the RC 28-200 relay drops, causing it to open and allowing the water to drain from the deluge valve's control chamber.

Certification & Compliance

UL Listed (when installed on OCV control valves)




Features & Benefits


- Extremely large water passages enable fast response
- Tough and durable construction



Depressurized command



Pressurized command

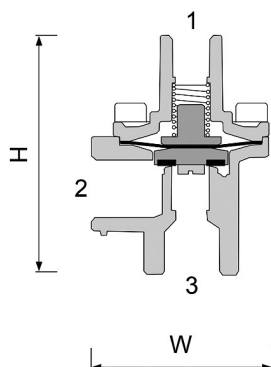

Operation

General		
Pressure Rating	25 bar / 360psi	
Fluid Temperature	80°C max / 175°F max	
Weight	1.4 kg / 3.1 lbs	
Materials	Standard	Optional*
Body & Bonnet	Brass	Stainless Steel
Internal Parts	Stainless Steel	--
Spring	Stainless Steel	--
Elastomers	EPDM	NBR
Dimensions		
H (Height) max	76 mm / 3"	
W (Width)	56 mm / 2 1/5"	
Port	Size	Connection
1	1/4" NPT	Pressure Command
2	1/2" NPT	Vent
3	1/2" NPT	Control Chamber

*Other materials available upon request. Minimum quantities may apply.

Aquestia Ltd. reserves the right to make product changes without prior notice. To ensure receiving updated information on parts specifications, please contact us at usa@aquestia.com. Aquestia Ltd. shall not be held liable for any errors. All rights reserved.

